Touret de câble USB 2.0, 100m, très flexible, diamètre extérieur 3mm, noir

Numéro d'article ART-R100
Longueur 100000mm

Description du produit

Touret de câble USB 2.0, très flexible, diamètre extérieur seulement 3mm, noir

Spécifications techniques

- Matériau du câble USB, fin et flexible
- longueur : 100m
- couleur : noir (semi-mat)
- diamètre : Ø 3mm +/- 0.15mm
- Câble de Copartner avec UL 2725, VW-1, 30V, 80°C
- 30AWG/1P (vert, blanc), 28AWG/2C (rouge, noir)
- double blindage
- compatible USB 2.0 & USB 1.1
- pour 480 Mbps (haute vitesse), 12 Mbps (pleine vitesse) et 1,5 Mbps (basse vitesse)
- Conforme à la directive RoHS
- Nous utilisons ce matériau de câble pour notre série de câbles ART-xx (Whiteflex Black Edition).
- Livraison sans fiche

Plus d'images

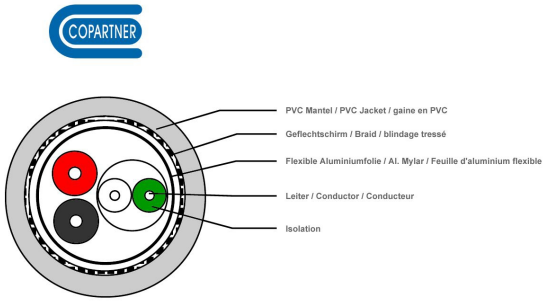

SPECIFICATION: 1P*30AWG +2C*28AWG+AL.Mylar +Braid

ITEM		SPECIFICATION	
CONDUCTOR	AWG	30AWG	28AWG
	MATERIAL	TINNED COPPER	TINNED COPPER
	COND.SIZE	7/0.10 ± 0.008mm	7/0.127 ± 0.008mm
INSULATION	MIN.AVG.THICK	0.15mm	0.10mm
	MATERIAL	HD-PE	SR-PVC LOW TOXIC
	O . D	0.66 ± 0.05mm	0.60 ± 0.05mm
	N O.	1P	2C
DRAIN	AWG	\	
	MATERIAL	\	
	SIZE	\	
Face Outside AL.MYLAR BRAID COPPER	COVERAGE	100%	
	OVERLAP	25% MIN	
	MATERIAL	TINNED COPPER	
	SIZE	16 *4/0.10± 0.008mm	
JACKET	MIN.AVG.THICK	0.23mm	
	MATERIAL	HALF MATT PVC	
	COLOUR	UL813 BLACK	
	O . D	3.00 ± 0.15 mm	

ELECTRICAL CHARACTERISTICS

1. Rating : TEMP 80℃; VOLTAGE 30V
2. Conductor Resistance: at 20℃MAX
   30AWG 376.96Ω/km ;28AWG 237.25Ω/km
3. Insulation Resistance: 10MΩ-km min at 20℃dc 500V
4. Dielectric Strength: AC 500V/1minute

COLOUR CODE:

2C*28AWG: 1.RED 2.BLACK
1P*30AWG: GREEN*WHITE

PHYSICAL PROPERTIES OF JACKET

1. Flexibility test: NO CRACKING
2. Flame test: PASS VW-1



E119932 AWM 2725 80 30V VW-1 COPARTNER

(c) COPARTNER WIRE & CABLE (SHENZHEN) MFG CO., LTD.